

MCT4
1/4 DIN MULTI-LOOP
CONTROLLER

EASY TO USE
TOUCH SCREEN
INTERFACE

OPERATES LIKE
YOUR FAVORITE
SMARTPHONE
OR TABLET



COMBINES MULTIPLE CONTROL
AND MONITOR COMPONENTS INTO
A SINGLE, LOW COST SOLUTION

Sales • Engineering

“Heat and Control
Specialists”



GORDO SALES, INC.

P.O. Box 1166, Layton, UT 84041
Phone: 801-544-4236 Fax: 888-264-0740
<http://www.gordosales.com>
lhuggins@gordosales.com

FUTUREDESIGN
CONTROLS

1/4 DIN MULTI-LOOP CONTROLLER

MTC4 BASE PRICE: \$550.00

SCHEDULE A

MCT4

1

2

3

4

5

6

7

1

SOFTWARE TYPE

Code	Description	Price
01	FDC MCT4	N/C
YY	Special Order Code	TBD

2

POWER INPUT

Code	Description	Price
4	90-264VAC 50/60 HZ	N/C
5	11-26VAC/VDC (not available 2018)	\$25.00

3

MODULE TYPE SLOT 1

Code	Description	Price
0	None	N/C
Pxxxx	Process Control Module (Refer to PCM order matrix)	*

*Refer to the PCM order matrix to complete part number above and module slot 1 price

4

MODULE TYPE SLOT 2

Code	Description	Price
0	None	N/C
Pxxxx	Process Control Module (Refer to PCM order matrix)	*
Hxxx	High Limit Module (Refer to HLM order matrix)	*

*Refer to the PCM or HLM order matrix to complete part number above and module slot 2 price

5

MODULE TYPE SLOT 3

Code	Description	Price
0	None	N/C
Pxxxx	Process Control Module (Refer to PCM order matrix)	*
Hxxx	High Limit Module (Refer to HLM order matrix)	*

*Refer to the PCM or HLM order matrix to complete part number above and module slot 3 price

6

DOCUMENTATION

Code	Description	Price
0	None	N/C
C	CD	\$25.00
U	USB memory stick	\$25.00
P	Printed Manual	\$39.00

7

SPECIAL ORDER CODE

Code	Description	Price
00	None	
XX	Special Order Code	

MCT4 PART NUMBER AND PRICING EXAMPLE:

MCT4-01-4-P1111-P1111-H111-000

MCT4 with 2 process control modules and a high limit module.

Standard software. 90-250VAC 50/60 HZ. Each process control module (slot #1 and #2 is equipped with 4 relay outputs. Slot 3 has a high limit module installed equipped with 2 relay outputs. No special order code.

MCT4 BASE \$550.00

PCM #1: P1111 \$209.00

PCM #2: P1111 \$209.00

HLM : H111 \$169.00

TOTAL \$1,137.00

PROCESS CONTROL MODULE

PCM BASE PRICE: \$149.00

SCHEDULE A



PCM modules can be installed in slots 1, 2 or 3

1

OUTPUT 1

Code	Description	Price
0	None	N/C
1	Relay 2A/240VAC (Form A)	N/C
2	Pulsed voltage to drive SSR, 5V/30mA	N/C
3	0-20mA/4-20mA isolated output (OM99-3)	\$26.00
4	0-10V isolated output (OM99-5)	\$26.00
C	Pulse voltage to drive SSR, 14V/40mA (OM99-7)	\$26.00

3

OUTPUT 3

Code	Description	Price
0	None	N/C
1	Relay 2A/240VAC (Form A)	\$20.00
2	Pulsed voltage to drive SSR, 5V/30mA	\$11.00
7	Transmitter power supply 20VDC/25mA (DC99-1)	\$30.00
8	Transmitter power supply 12VDC/40mA (DC99-2)	\$30.00
A	Transmitter power supply 5VDC/80mA (DC99-3)	\$30.00
C	Pulse voltage to drive SSR, 14V/40mA (OM99-7)	\$26.00

2

OUTPUT 2

Code	Description	Price
0	None	N/C
1	Relay 2A/240VAC (Form A)	\$20.00
2	Pulsed voltage to drive SSR, 5V/30mA	\$11.00
3	0-20mA/4-20mA isolated output (OM99-3)	\$30.00
4	0-10V isolated output (OM99-5)	\$30.00
7	Transmitter power supply 20VDC/25mA (DC99-1)	\$30.00
8	Transmitter power supply 12VDC/40mA (DC99-2)	\$30.00
A	Transmitter power supply 5VDC/80mA (DC99-3)	\$30.00
C	Pulse voltage to drive SSR, 14V/40mA (OM99-7)	\$26.00

4

OUTPUT 4

Code	Description	Price
0	None	N/C
1	Relay 2A/240VAC (Form A)	\$20.00
2	Pulsed voltage to drive SSR, 5V/30mA	\$11.00
3	Retransmit 0-20mA/4-20mA isolated output (OM99-3)	\$30.00
4	Retransmit 0-10VDC (OM99-5)	\$30.00
7	Transmitter power supply 20VDC/25mA (DC99-1)	\$30.00
8	Transmitter power supply 12VDC/40mA (DC99-2)	\$30.00
A	Transmitter power supply 5VDC/80mA (DC99-3)	\$30.00
C	Pulse voltage to drive SSR, 14V/40mA (OM99-7)	\$26.00

PCM Modules support Universal Analog Signal Inputs T/C-RTD, mA and VDC.

Hardware configuration is via board DIP switch.

Default hardware configuration is T/C-RTD.

HIGH LIMIT MODULE (HLM)

HLM BASE PRICE: \$149.00

SCHEDULE A

H



HLM modules can be installed in:
• Slot 2 with 2-loop system
• Slot 3 with 3-loop system

1

SIGNAL INPUT*

Code	Description	Price
1	Thermocouple: J, K, T, E, B, R, S, N, L, C, P, PT100, JIS, 0-60mV	N/C
2	Voltage 0-1VDC	N/C
3	Voltage 0-10VDC	N/C
4	Current 0-20mA (4-20mA)	N/C
5	Voltage 0-5VDC (1-5VDC)	N/C

2

OUTPUT 1

Code	Description	Price
0	None	N/C
1	Relay 2A/240VAC (Form C)	N/C
2	Pulsed voltage to drive SSR, 5V/30mA	N/C
3	Pulse voltage to drive SSR, 14V/40mA (OM99-7)	\$26.00

3

OUTPUT 2


Code	Description	Price
0	None	N/C
1	Relay 2A/240VAC (Form C)	\$20.00
2	Pulsed voltage to drive SSR, 5V/30mA	\$11.00
7	Transmitter power supply 20VDC/25mA (DC99-1)	\$30.00
8	Transmitter power supply 12VDC/40mA (DC99-2)	\$30.00
A	Transmitter power supply 5VDC/80mA (DC99-3)	\$30.00
C	Pulse voltage to drive SSR, 14V/40mA (OM99-7)	\$26.00

HLM signal input order code #1 supports analog input types T/C-RTD, mA, 0-10 VDC, 4-20/0-20mA.
Hardware configuration for each input type is via DIP switch.

*HLM configured with Signal Inputs 0-60mV, 0-1VDC, 0-5VDC, 0-10VDC or 4-20/0-20mA are NOT FM approved

SPECIFICATION AND FEATURE REVIEW

DIMENSIONAL DRAWINGS AND PCM/HLM WIRING DIAGRAMS

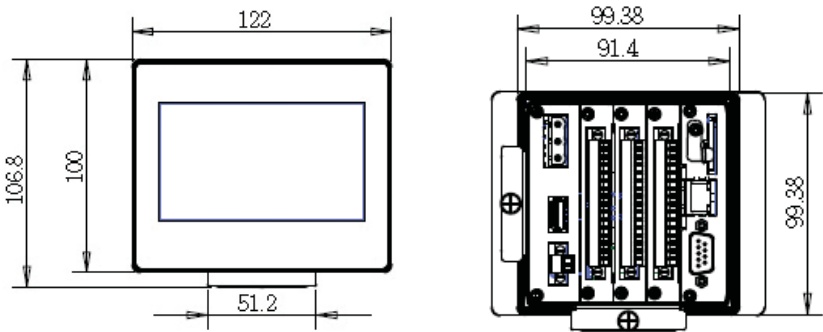

SCHEDULE D

MCT CONTROL MODULE PARTS PRICING

PCM & HLM OUTPUT COMPONENTS
 OUTPUT TYPE: PCM OUT #1, #2, #3 & #4/HLM OUT #1 & #2

Description	Price
Relay 2A/240VAC (Form A R70417Q)	\$20.00
0-20mA/4-20mA isolated (OM99-3)	\$30.00
0-10VDC isolated (OM99-5)	\$30.00
SSRD 5V/30mA Kit: (SSRD-5V/30mA)	\$10.00
Pulse voltage to SSR 14V/40mA (OM99-7)	\$26.00

TERMINAL BLOCKS FOR MCT4 ENCLOSURE, PCM & HLM

Description	Price
POWER INPUT - Part #: 10343-1203A-01-10	\$5.00
COMMS - Part #: 10343-1202B-10-00	\$4.00
PCM - Part #: 10343-1216B-03-00	\$20.00
HLM - Part #: 10343-1216B-10-00	\$20.00

Note: the terminal block mounting screw used to hold the plug to the header is attached with plug.

PCM & HLM TRANSMITTER POWER SUPPLY COMPONENTS
 PCM OUTPUT #2, #3 AND #4/HLM OUTPUT #2

Description	Price
20VDC/25mA Supply (DC99-1)	\$30.00
12VDC/40mA Supply (DC99-2)	\$30.00
5VDC/80mA Supply (DC99-3)	\$30.00

DOCUMENTATION




Description	Price
MCT4-UserManual-CD	\$25.00
MCT4-UserManual-USB	\$25.00
MCT4-UserManual-Printed	\$39.00

MISC. HARDWARE AND MOUNTING SCREWS

Description	Price
SD card holding clamp (10451-MTMCT45B-00)	\$5.00
SD card mounting screw (10483-00300600701)	\$5.00
Screws used to hold PCM, HLM, SD Mounting screw and the right / left end slots into enclosure (common to all) Part #: 10483-00300400701 (package of 12)	\$5.00

SPECIFICATION AND
FEATURE REVIEW

DIMENSIONAL DRAWINGS AND PCM/HLM WIRING DIAGRAMS

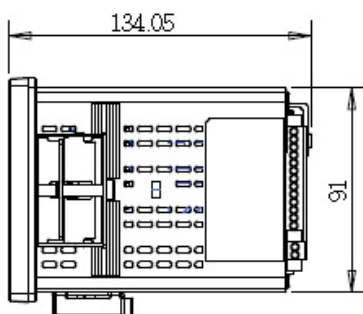

SPECIFICATION AND FEATURE REVIEW

COMMAND BAR ICONS NAVIGATION, HELP & HOME

The Master Command Bar located on the top of the display provides easy & intuitive 1-touch access from anywhere in the system to System Navigation, Help and configured Home view

Home brings the user back to the system "Home View". The Home icon can be configured for the following standard views;

- Loop view: includes PV & SP digital display, PV min/max, PID % Output, Auto-Manual, event & profile access and more.
- Overview: all loops, profile and event status
- Chart View (trend up to the last 24 hours from system RAM) supporting 4 Trend View charts with up to 6 values per chart
- Alarm View or Alarm File.

Help offers content sensitive text for every view /page in the user configured language.

Navigation provides access to the configured menu system, traditional drop down or icon.

SECURITY AND AUDIT TRAIL

- Supports up to 30 users over four user groups with access to 40+ functions restricted by user group.
- Supports password aging and verification.
- Operator Audit Trail provides history for all user activity that includes date, time, user name and action; i.e. Loop SP change from 55.2 to 103.5.

PROFILE RAMP/SOAK

- Loop 1 and/or 2; loop 3 always static
- Start: via touch screen or Event input
- Profile Name: Free form 16 character naming convention.
- Global Profile Configuration:
 - Start from PV or static SP
 - Guaranteed Soak & Ramp band
 - Power Fail / Recovery: Continue from last SP value, PV or static mode.
- Profile Segments: (maximum of 64)
- Guaranteed Soak & Ramp per step
- Events: up to 3 or 6 events per step (1 or 2 loop).
- Jump-To Step: configurable per step
- Profile End Alarm
- Configurable Profile End Logic:
 - Current (Static) Control SP: the Set Point & Event status prior to Profile Start is loaded at end of the Profile.
 - Final SP of Profile with all Events off

ALARMS

- Up to 19 alarms, 10 soft configurable to PCM & HLM, up to 3 alarm outputs per PCM and HLM up to 2 alarm outputs.
- Loop* Alarm Types: Process High & Low, Deviation High & Low, Deviation Band, Event Input and End of Profile.

*PCM configured as Monitor Input (no PID control configurable only with Process alarms.

Alarm Mode:

Normal or Hold (on start-up Hold mode will not activate if in alarm condition and arm once out of alarm condition).

Silent Alarm, activation does not indicate alarm or write to alarm log file.

Alarm outputs configurable as latching or nonlatching.

DATA ACQUISITION

- Data log PV, SP and PID percent output.
- File name: Free form 16 character appended by time/date or the profile name if started with a profile.
- File Start/Stop: user on-demand, on system boot or profile ramp-soak start/end.
- Data Log interval: configurable 1-second to 31-minutes.
- File Interval: configurable to set time in days (1 to 31) to end and start a new file. This allows syncing files to match product cycles as well as keeping file size manageable.
- ID#1 and ID#2 fields allow user to enter specific information such as a batch and/or lot information that is associated with the data file.
- Operator Comments/Events: Unlimited operator comments/ events linked to each file
- File Type: Data Log files are saved in .csv format.
- Digital Signatures: Automatic system as well as user entered signatures.
- Historical Data Viewer: View data log files on the display. Chart is auto-scaled on an X & Y axis for time and units.
- Meets the requirements for:
 - CFR21 Part 11
 - AMS2750E

EVENT INPUTS

- PCM / HLM each have 1 event input configurable for one of the following functions.
- PCM: Profile Run, Hold, Run/Hold, Abort, Step Advance, Failure Transfer (Outputs), Alarm Input (indication only) and Loop Status Input
- HLM: Remote Reset

SPECIFICATION AND FEATURE REVIEW

PROCESS CONTROL (PCM) AND HI-LIMIT (HLM) MODULE SPECIFICATION

INPUT SPECIFICATIONS*

Type	Range	Accuracy @ 24 C	Input Impedance
J	-120 C 1000 C (-184 F 1832 F)	+/-2 C	2.2 Mohms
K	-200 C 1370 C (-328 F 2498 F)	+/-2 C	2.2 Mohms
T	-250 C 400 C (-418 F 752 F)	+/-2 C	2.2 Mohms
E	-100 C 900 C (-148 F 1652 F)	+/-2 C	2.2 Mohms
B	0 C 1820 C (-32 F 3308 F)	+/-2 C (200-1820 c)	2.2 Mohms
R	0 C 1767.8 C (-32 F 3214 F)	+/-2 C	2.2 Mohms
S	0 C 1767.8 C (-32 F 3214 F)	+/-2 C	2.2 Mohms
N	-250 C 1300 C (-418 F 2372 F)	+/-2 C	2.2 Mohms
L	-200 C 900 C (-328 F 1652 F)	+/-2 C	2.2 Mohms
C	0 C 2315 C (32 F 4199 F)	+/-2 C	2.2 Mohms
P	0 C 1395 C (32 F 2543 F)	+/-2 C	2.2 Mohms
PT100 (DIN)	-210 C 700 C (-346 F 1292 F)	+/-0.4 C	1.3 Kohms
PT100 (JIS)	-200 C 600 C (-328 F 1112 F)	+/-0.4 C	1.3 Kohms
MV	-8mV 70mV	+/-0.05%	2.2 Mohms
MA	-3mV 27mA	+/-0.05%	70.5 Ohms
V	-1.3V 11.5V	+/-0.05%	302 Kohms

*When subject to the necessary field calibration, the MCT4 is suitable for use in Nadcap applications in all furnace classes as defined in AMS2750E clause 3.3.1.

Resolution: 18 bits
Sampling Rate: 5 times / second
Maximum Rating: -2VDC minimum, 12VDC maximum
 (1 minute for mA input)
Temperature Effect: A1.5uV/ C for all inputs except mA input
 A3.0uV/ C for mA input

Sensor Lead Resistance Effect:
 T/C: 0.2uV/ohm
 3-wire RTD: 2.6 C/ohm of resistance
 difference of two leads
 2-wire RTD: 2.6 C/ohm of resistance
 sum of two leads

Sensor Break Responding Time:
 Within 4 seconds for TC, RTD and mV inputs,
 0.1 second for 4-20 mA and 1 - 5VDC inputs.

Burn-out Current: 200 nA

Common Mode Rejection Ratio (CMRR): 120dB

Normal Mode Rejection Ratio (NMRR): 55dB

Sensor Break Detection: Sensor open for TC, RTD and mV inputs,
 Sensor short for RTD input
 below 1 mA for 4-20 mA input,
 below 0.25VDC for 1 - 5VDC input,
 unavailable for other inputs.

Electrical Isolation: Optical isolation; 1500V~ (ac) minimum, between
 input signals and power supply circuit.

OUTPUT SPECIFICATIONS:

Relay Rating: 2A/240 VAC, life cycles 200,000 for resistive load

Pulsed Voltage: Source Voltage 5V @30mA, current limiting resistance 66 ohms
 Source Voltage 14V@40mA, current limited at 70mA

Linear Output (PCM):

Resolution: 15 bits
Output Regulation: 0.02% for full load change
Output Settling Time: 0.1 sec. (stable to 99.9%) Isolation
Breakdown Voltage: 1000 VAC
Temperature Effect: +/- 0.01% of span per degree C

Analog Retransmission (PCM):

Output Signal: 4-20 mA, 0-20 mA,
 0 - 5VDC, 1 - 5VDC, 0 - 10VDC
Resolution: 15 bits
Accuracy: +/-0.05% of span +/-0.0025% / C Load
Resistance: 0 - 500 ohms (for current output)
 10K ohms minimum (for voltage output)
Output Regulation: 0.01% for full load change
Output Settling Time: 0.1 sec. (stable to 99.9%)
Isolation Breakdown Voltage: 1000 VAC min. Integral
Linearity Error: +/-0.005% of span
Temperature Effect: +/-0.0025% of span per degree C
Saturation Low: 0 mA (or 0 VDC)
Saturation High: 22.2 mA (or 5.55VDC, 11.1VDC min)
Linear Output Range: 0-22.2mA (0-20mA or 4-20mA)
Volts DC: 0 - 5.55VDC (0 - 5VDC, 1 - 5VDC)
 0 - 11.1VDC (0 - 10VDC)

CONTROL FUNCTION (PCM):

Control Action: Direct and reverse

Proportional Band:

Temperature: 0.1 to 500C (0.1 to 900F)
Linear Input: 0.1 to 900.0

Reset (Auto): 0 to 3600 seconds

Rate (Derivative): 0 to 900.0 seconds

PB Offset: 0 to 100%

Dual PID Heat/Cool (bimodal):

Cool Proportional Band 50 to 300% of heat PB
Proportional Deadband -36.0% to +36.0% of heat PB

Time Proportioning Cycle Time:

0.1 to 90 seconds

On-Off / Alarm Hysteresis (PCM/HLM):

0.1 to 50C (0.1 to 90.0F)

EVENT INPUT SPECIFICATIONS:

Logic Low: -10V minimum, 0.8V maximum
Logic High: 2V minimum, 10V maximum

APPROVAL STANDARDS:

UL / cUL: UL 61010C-1
EN: EN 61010-1 (IRC-1010-1)
EMC: EMC 61326
RoHS: RoHS 2.0 Compliant, W.E.E.E.
FM (HLM): FM temperature limit switch - indicating



Sales • Engineering

“Heat and Control
Specialists”



GORDO SALES, INC.

P.O. Box 1166, Layton, UT 84041
Phone: 801-544-4236 Fax: 888-264-0740
<http://www.gordosales.com>
lhuggins@gordosales.com

 **FUTUREDESIGN**
C O N T R O L S