


Drum Pumps For Non-Corrosive Liquids

ALUMINUM PUMP PACKAGE

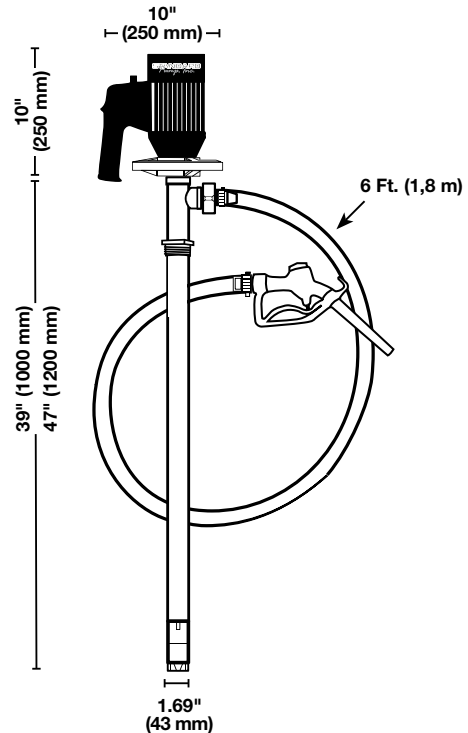

Technical Specifications

Package:Motor, Pump, Hose, Storage Bracket
Barrel Adapter & Hand Nozzle
Motor Type:Open Drip Proof (IP44)
Pump Assembly:Aluminum, Carbon, PTFE & SS316
Immersion Length:..... 39" (1000 mm) or 47" (1200 mm)
Discharge Hose:..... PVC, 1" (25 mm) I.D., 6 ft. (1,8 m)
Hand Nozzle:Aluminum, 1" (25 mm)

Discharge:..... 1" (25 mm) Hose Barb
Pump Design:..... Sealless / Centrifugal
Maximum Viscosity: 1500 cps (mPas)
Maximum Specific Gravity: 1.8
Maximum Temp:175° F (80° C)
Maximum Flow Rate:..... 22 GPM (83 LPM)

Package Numbers:

Drums:

Pkg P/N	Motor	Volts	Pump Tube
9460	SP-280P-V	110V	SP-AL-39
9461	SP-280P-2-V	220V	SP-AL-39

Tanks:

Pkg P/N	Motor	Volts	Pump Tube
9462	SP-280P-V	110V	SP-AL-47
9463	SP-280P-2-V	220V	SP-AL-47

Sales • Engineering
 "Heat and Control
 Specialists"



GORDO SALES, INC.

P.O. Box 1166 Layton, UT 84041
 Phone: 801-544-4236 Fax: 888-264-0740
<http://www.gordosales.com>