


**BriskHeat<sup>®</sup> HTC Heating Cords**

**Product Highlights**

- ✓ Designed for use on small tubes, vessels, or any application where space is limited
- ✓ Can be wrapped around objects as small as 1/8" (3mm) diameter
- ✓ Exceptional flexibility
- ✓ Rapid thermal response
- ✓ Exceptional durability: excellent for laboratory, production, or maintenance applications

**Specifications:**

- Maximum exposure temperature: 900°F (482°C)
- Wrap around diameters as small as 1/8" (3.2mm)
- Fiberglass knitted and braided construction
- Double braided fiberglass outer sheath
- Suitable for electrical conductive surfaces
- 120VAC
- Includes high temperature tie downs

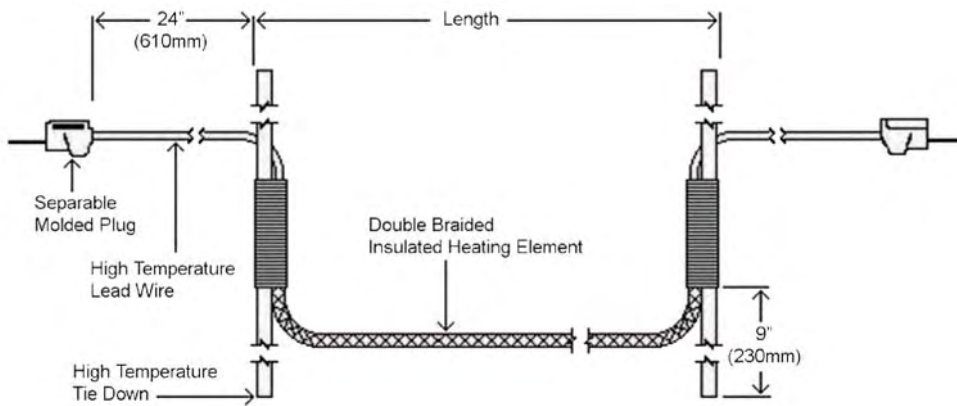

**Ordering Information:**

Diameter in (mm)	Length in (mm)	Total Watts	Part No.
3/16 (4.8)	36 (915)	64	HTC451001
3/16 (4.8)	72 (1829)	125	HTC451002
3/16 (4.8)	144 (3658)	260	HTC451003

**IMPORTANT: Temperature controller is required for this product. See page 10-1 for options.**

