

**BriskHeat® HWC High Temperature Heating Cords**


**Product Highlights**

- ✓ Excellent for laboratory, production, or maintenance applications
- ✓ Designed for use on small tubes, vessels, or any place where space is limited
- ✓ Can be wrapped around objects as small as 1/8" (3mm) diameter
- ✓ Exceptional flexibility
- ✓ Rapid thermal response



**Specifications:**

- Maximum exposure temperature: 1400°F (760°C)
- Wrap around diameters as small as 1/8" (3.2mm)
- Cord diameter: 3/16" (4.8mm)
- Power density average: 60 watts/ft (196 watts/m)
- Double braided high temperature Samox® fiberglass outer sheath
- Suitable for electrical conductive surfaces
- 120 or 240VAC
- 24" to 72" (610 to 2829mm) long power leads with
  - 120VAC: separable molded plug
  - 240VAC: bare wire connection
- Includes high temperature tie downs

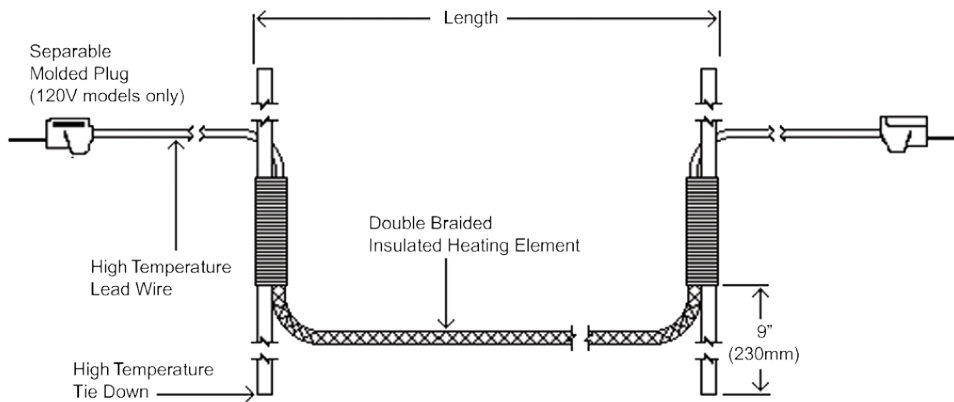

**Ordering Information:**

Cord Length		Total Watts	Lead Length	Part Numbers	
ft	m			120VAC	240VAC
4	1.2	266	2ft (61cm)	HWC1040	N/A
6	1.8	355	2ft (61cm)	HWC1060	N/A
12	3.7	750	6ft (183cm)	HWC1120	HWC2120
18	5.5	1000	6ft (183cm)	HWC1180	HWC2180
24	7.3	1500	6ft (183cm)	HWC1240	HWC2240

**IMPORTANT: Temperature controller is required for this product. See page 10-1 for options.**