

Your **Heating** Specialist since 1949

SpeedTrace & SpeedTrace Extreme Pre-Assembled Self-Regulating Heating Cable

Product Highlights

- ✓ Ideal for freeze protection and thawing: metal or plastic pipes and valves
- ✓ Suitable for temperatures down to: -40°F (-40°C)
- ✓ Indoor or outdoor use
- ✓ Easy-to-install: pre-assembled with power cord and plug
- ✓ Safe to overlap and insulate
- ✓ Automatically adjusts heat output based on surface and ambient temperature
- ✓ No temperature controller is required



CABLE / WIRE




Specifications:

- Supply voltage: 110-120VAC
- Wattage at 50°F (10°C)
 - SpeedTrace: 5 watts/ft (16 watts/m)
 - SpeedTrace Extreme: 8 watts/ft (26 watts/m)
- Maximum exposure temperature: 150°F (65°C)
- Moisture and flame resistant thermoplastic elastomer outer jacket
- 16 AWG bus wires
- Pre-terminated 30" (76cm) long power cord with standard 3-prong (NEMA-5-15) plug

Ordering Information:

Length	Part Number	
	SpeedTrace	SpeedTrace Extreme
6ft (1.8m)	FFSL1-6	FFSL81-6
12ft (3.7m)	FFSL1-12	FFSL81-12
18ft (5.5m)	FFSL1-18	FFSL81-18
24ft (7.3m)	FFSL1-24	FFSL81-24
50ft (15.2m)	FFSL1-50	FFSL81-50
75ft (22.8m)	FFSL1-75	FFSL81-75
100ft (30.5m)	FFSL1-100	FFSL81-100

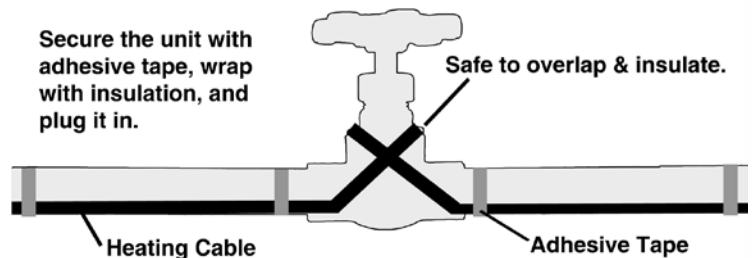

Roof and Gutter kits also available. Contact us for details.

Accessories:

Adhesive Tape

Allows for easy installation and increased efficiency by providing intimate contact with surface to be heated.

Part Number	Material	Width	Length	Temperature Limit
		in (mm)	Yards (m)	
PSAT36A	Fiberglass	0.5 (13)	36 (32.9)	350°F (176°C)

INSUL-LOCK® DS Flexible Closed Cell Pipe Insulation

- Easy-to-install
- Cost effective, flexible thermal insulation for pipes
- Suitable for indoor or outdoor use

See next page for options

Thermo Cube Thermostatically Controlled Outlet

PN: THERMO-CUBE



- Power-saving outlet
- Only runs in cold temperatures
- Turns on the power when air temperature reaches approximately 35°F (2°C)
- Turns off the power when the temperature exceeds approximately 45°F (7°C)
- Suitable for outdoor use

Sales • Engineering
"Heat and Control
Specialists"



GORDO SALES, INC.

P.O. Box 1166 Layton, UT 84041
Phone: 801-544-4236 Fax: 888-264-0740
<http://www.gordosales.com>